

Product News

New Product

Indoor / Outdoor **IP65**

Medium-sized, water-proof & dust-proof enclosures (RAC-TH, ORC-TH series)

Outline


To protect internal equipment from water, dust, and other external intrusion, we have launched a new IP65 medium-size enclosure with high water-proof and dust-proof performance.

Feature


- Water-proof and dust-proof enclosure best suited for control panel.
- Connectable side by side
- Lockable water-proof double-bit cam lock handle is adopted
- Openable door even when it is placed close to the wall



Specification

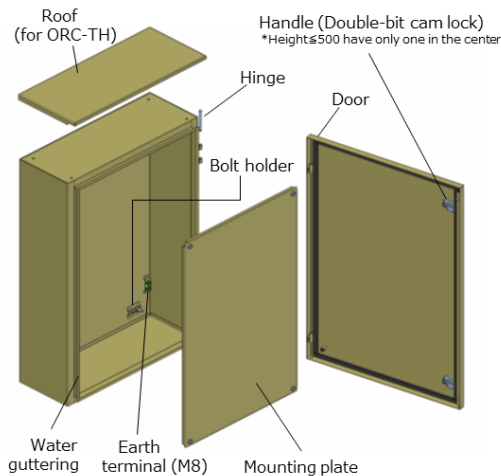

Drainage structure

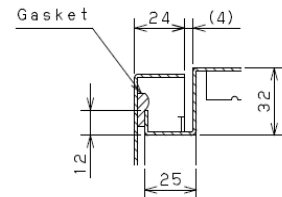

Color	Light beige (5Y7/1)
Paint	Powder paint, smooth, without E-coat
Material	Steel
Mounting plate	Steel, 2.0mm thickness, without grid line
Thickness	Door: 1.5mm, Body: 1.5mm
Handle	Double-bit cam lock
Door	Single door

RAC-TH



ORC-TH (with roof)



Model	External dimensions (mm)			Mounting plate (mm)		Usable depth (mm)	Weight (kg)	Model	External dimensions (mm)			Mounting plate (mm)		Usable depth (mm)	Weight (kg)
	W	H	D	W	H				W	H	D	W	H		
RAC12-33TH	300	300	120	220	220	98	5.8	ORC12-33TH	300	300	120	220	220	98	6.8
RAC12-34TH	300	400		220	320		7.4	ORC12-34TH	300	400		220	320		8.3
RAC12-43TH	400	300		320	220		7.4	ORC12-43TH	400	300		320	220		8.6
RAC16-33TH	300	300	160	220	220	138	6.4	ORC16-33TH	300	300	160	220	220	138	7.6
RAC16-34TH	300	400		220	320		8.0	ORC16-34TH	300	400		220	320		9.2
RAC16-43TH	400	300		320	220		8.0	ORC16-43TH	400	300		320	220		9.5
RAC16-44TH	400	400		320	320		10.1	ORC16-44TH	400	400		320	320		11.6
RAC16-45TH	400	500		320	420		12.3	ORC16-45TH	400	500		320	420		13.8
RAC16-57TH	500	700		420	620		20.1	ORC16-57TH	500	700		420	620		21.9
RAC16-58TH	500	800		420	720		22.8	ORC16-58TH	500	800		420	720		24.6
RAC16-59TH	500	900		420	820		25.5	ORC16-59TH	500	900		420	820		27.3
RAC16-512TH	500	1200		420	1120		33.6	ORC16-512TH	500	1200		420	1120		35.4
RAC16-612TH	600	1200	520	1120	39.1	ORC16-612TH	600	1200	520	1120	40.5				
RAC20-33TH	300	300	200	220	220	178	7.0	ORC20-33TH	300	300	200	220	220	178	8.4
RAC20-34TH	300	400		220	320		8.7	ORC20-34TH	300	400		220	320		10.1
RAC20-44TH	400	400		320	320		11.0	ORC20-44TH	400	400		320	320		12.8
RAC20-45TH	400	500		320	420		13.2	ORC20-45TH	400	500		320	420		15.0
RAC20-46TH	400	600		320	520		15.3	ORC20-46TH	400	600		320	520		17.1
RAC20-54TH	500	400		420	320		13.2	ORC20-54TH	500	400		420	320		15.4
RAC20-55TH	500	500		420	420		15.8	ORC20-55TH	500	500		420	420		18.0
RAC20-56TH	500	600		420	520		18.4	ORC20-56TH	500	600		420	520		20.6
RAC20-57TH	500	700		420	620		21.0	ORC20-57TH	500	700		420	620		23.2
RAC20-59TH	500	900		420	820		26.7	ORC20-59TH	500	900		420	820		28.9
RAC20-512TH	500	1200		420	1120		35.1	ORC20-512TH	500	1200		420	1120		37.3
RAC20-65TH	600	500		520	420		18.5	ORC20-65TH	600	500		520	420		21.0
RAC20-66TH	600	600		520	520		21.4	ORC20-66TH	600	600		520	520		24.0
RAC20-68TH	600	800		520	720		27.5	ORC20-68TH	600	800		520	720		30.1
RAC20-612TH	600	1200		520	1120		40.7	ORC20-612TH	600	1200		520	1120		43.3
RAC25-45TH	400	500	250	320	420	228	14.3	ORC25-45TH	400	500	250	320	420	228	16.4
RAC25-55TH	500	500		420	420		17.4	ORC25-55TH	500	500		420	420		19.7
RAC25-56TH	500	600		420	520		19.8	ORC25-56TH	500	600		420	520		22.4
RAC25-58TH	500	800		420	720		24.7	ORC25-58TH	500	800		420	720		27.3
RAC25-65TH	600	500		520	420		20.0	ORC25-65TH	600	500		520	420		22.9
RAC25-66TH	600	600		520	520		23.0	ORC25-66TH	600	600		520	520		26.1
RAC25-68TH	600	800		520	720		29.3	ORC25-68TH	600	800		520	720		32.4
RAC25-69TH	600	900		520	820		32.8	ORC25-69TH	600	900		520	820		35.9
RAC25-610TH	600	1000		520	920		35.6	ORC25-610TH	600	1000		520	920		38.7
RAC25-612TH	600	1200		520	1120		41.9	ORC25-612TH	600	1200		520	1120		45.0
RAC25-75TH	700	500		620	420		22.7	ORC25-75TH	700	500		620	420		26.3
RAC25-76TH	700	600		620	520		26.4	ORC25-76TH	700	600		620	520		29.9
RAC25-77TH	700	700		620	620		30.1	ORC25-77TH	700	700		620	620		33.6
RAC25-78TH	700	800		620	720		33.7	ORC25-78TH	700	800		620	720		37.2
RAC25-710TH	700	1000		620	920		41.0	ORC25-710TH	700	1000		620	920		44.6
RAC30-45TH	400	500	300	320	420	278	15.6	ORC30-45TH	400	500	300	320	420	278	18.1
RAC30-46TH	400	600		320	520		18.1	ORC30-46TH	400	600		320	520		20.6
RAC30-55TH	500	500		420	420		18.5	ORC30-55TH	500	500		420	420		21.6
RAC30-56TH	500	600		420	520		21.4	ORC30-56TH	500	600		420	520		24.5
RAC30-65TH	600	500		520	420		21.4	ORC30-65TH	600	500		520	420		25.0
RAC30-66TH	600	600		520	520		24.8	ORC30-66TH	600	600		520	520		28.3
RAC30-67TH	600	700		520	620		28.1	ORC30-67TH	600	700		520	620		31.7
RAC30-68TH	600	800		520	720		31.5	ORC30-68TH	600	800		520	720		35.0
RAC30-76TH	700	600		620	520		28.1	ORC30-76TH	700	600		620	520		32.2
RAC30-77TH	700	700		620	620		31.9	ORC30-77TH	700	700		620	620		36.0
RAC30-78TH	700	800		620	720		35.9	ORC30-78TH	700	800		620	720		39.8
RAC30-710TH	700	1000		620	920		43.3	ORC30-710TH	700	1000		620	920		47.4
RAC30-810TH	800	1000		720	920		48.5	ORC30-810TH	800	1000		720	920		53.1

